



www.alphatronics.be

AT park II Entrance-/Exit station

User-friendly and cost-efficient car park management

Increased vehicle throughput and convenient customer management are the criteria by which parkers judge the quality of a parking facility. This impression is enhanced by the reliability of the system. The AT Park II entrance and exit stations' design is based on this customer perspective. The user-friendly concept of our machines is characterised

by large-scale, multi-lingual customer displays with clear instructions.

Depending upon the customers preferences or parking user profile, entry and exit stations can be equipped with **barcode ticket technology** or **contactless identification system**.

Properties

- Largely dimensioned display in the client's language
- Ergonomically positioned operating elements
- Capacity of 3000 tickets
- Heating with thermostat

User interface

- Illuminated LCD display with 4 x 20 digits
- Illuminated LED button for ticket output
- Integrated intercom system (optional)

Network

- Local network via CU20
- Optional TCP/IP network
- Central management guarantee efficient service and maintenance



Technical specifications

Power supply
230 VAC 50Hz

Load
System 100 VA
Heating 200 VA

Display
LCD display with 4x20 digits


Communication
CU20, TCP/IP

Operating temperature
-30°C to +60°C

Ticket media
Barcode

Housing
steel, powder-coated

Standard colours
Blue (RAL 5003)
white aluminium (RAL 9006)
Anthracite (NCS 7500)

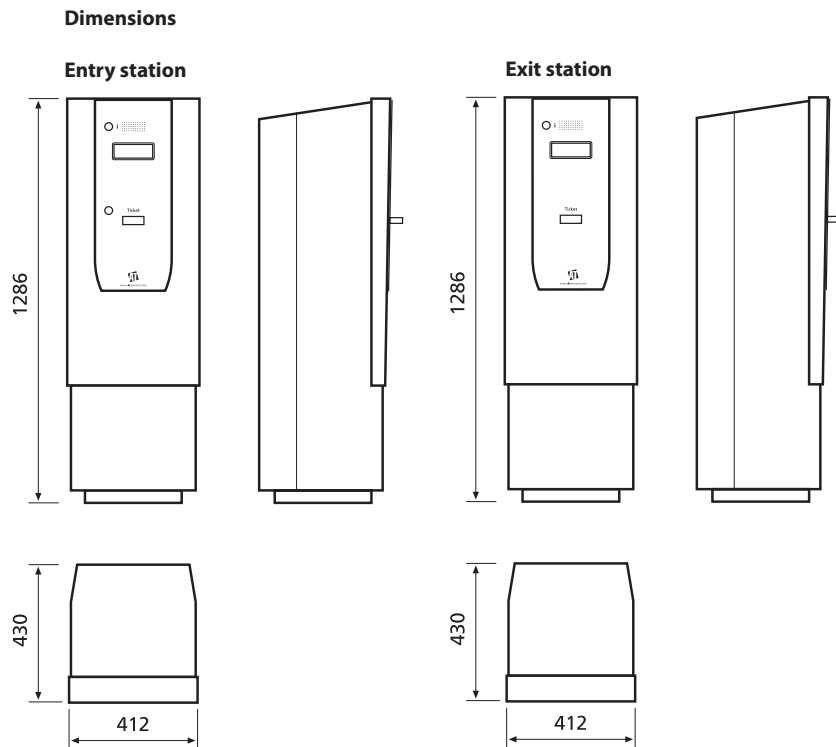

Les informations données sont spécifiques pour l'équipement décrit.
Tous les articles ici décrits peuvent changer sans avertissement préalable.

Imprimé en Belgique • Novembre 2006



www.alphatronics.be



Alphatronics nv

Brandstraat 8a • B-9160 Lokeren • België
Tel. +32 9 253 54 49 • Fax +32 9 253 53 68

info@alphatronics.be