


# ITSV-2

## IP Touch Station with Video

The ITSV-2 is a powerful desktop video phone featuring Android 7.0, a 5" capacitive touch screen, tiltable camera, HDMI output, dual microphones and support for 720p HD video.

The ITSV-2 delivers advanced SIP telephony features and out-of-the-box integration with our IC-EDGE and ICX-AlphaCom IP intercom platforms.


Package contents: ITSV-2 unit, handset with cord, base stand, universal power supply, network cable, screen cleaning cloth and quick installation guide.

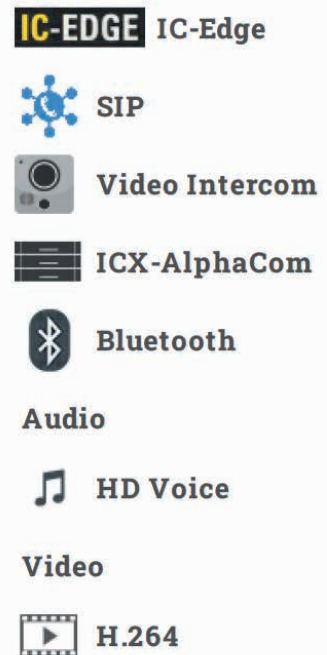

- Video desktop intercom station supporting ICX-AlphaCom, SIP and IC-EDGE solutions
- 4-core 1.3GHz ARM Cortex A53 processor with 2GB RAM and 8GB eMMC Flash
- Runs on Android 7.0 operating system
- 5.0" (1280x720) capacitive 5-point touch screen HD TFT LCD
- Built-in Bluetooth for syncing with mobile devices and connecting Bluetooth headset
- Integrated dualband WiFi (2.4GHz & 5GHz)
- Built-in PoE/PoE+ to power the device and give it a network connection
- Built-in 1 mega-pixel camera for video calling with privacy shutter
- 6-way audio conferencing & 3-way 720p 30fps HD video conferencing capability
- Speakerphone with HD acoustic chamber, advanced echo cancellation & excellent double-talk performance
- Dual-switched auto-sensing 10/100/1000Mbps network ports
- Supports up to 16 SIP accounts



## Dimensions

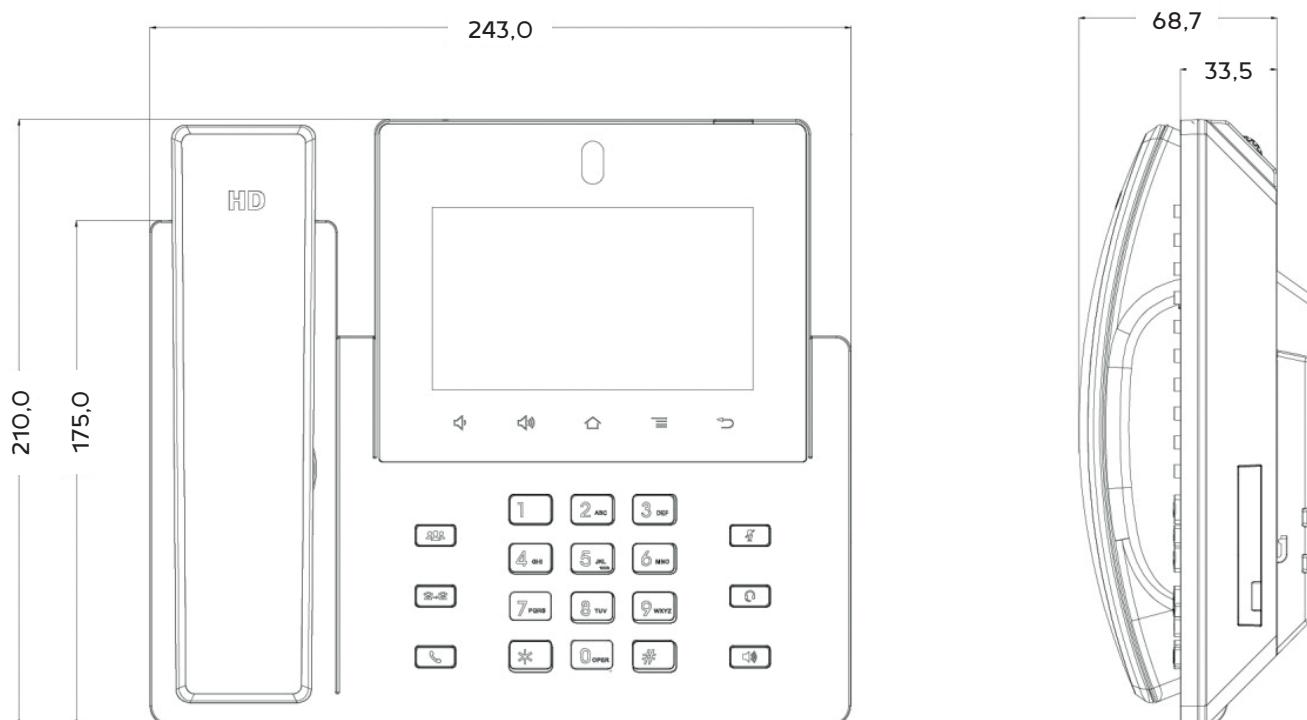

Technical specifications	
<b>Dimensions (WxLxH)</b>	210 mm (W) x 243 mm (L) x 68,7 mm (H)
<b>Weight</b>	1 kg
<b>Graphic Display</b>	5" (1240 x 720) capacitive (5 points) touch screen HD TFT LCD
<b>Camera</b>	Tiltable mega-pixel CMOS camera with privacy shutter, 720P - 30fps
<b>Auxiliary Ports</b>	RJ9 headset jack (allowing EHS with Plantronics headsets), 3.5mm stereo headset with microphone, USB port, SD, HDMI-out (1.4 up to 720p30fps)
<b>Feature keys</b>	11 functions keys for CONFERENCE, TRANSFER, SEND/REDIAL, MUTE, EARPHONE, SPEAKERPHONE, VOLUME /+-. 3 dedicated Android keys for HOME, MENU, and BACK
<b>Video Codec</b>	H.263, H.264 BP/MP/HP
<b>Video resolution</b>	Up to 720p
<b>Video frame rate</b>	Up to 30 fps
<b>Operating temperature range</b>	0°C to +40°C
<b>Storage temperature range</b>	-10°C to +60°C
<b>Relative humidity</b>	10% - 90% non-condensing
<b>Power options</b>	Power over Ethernet (PoE) or power adapter.
<b>Power over Ethernet</b>	802.3af Class 3, 802.3at Class 4
<b>Power adapter</b>	Input: 100-240VAC 50-60Hz; Output 12VDC 1.5A
<b>Network Interface</b>	2 x RJ45 (Ethernet) 10/100/1000 Mbps with integrated PoE
<b>Bluetooth</b>	Integrated, Bluetooth 4.2 + EDR
<b>Wi-Fi</b>	Integrated, dual-band 2.4 & 5GHz with 802.11 a/b/g/n
<b>Security</b>	User and administrator level passwords, MD5 and MD5-sess based authentication, 256-bit AES encrypted configuration file, TLS, SRTP, HTTPS, 802.1x media access control
<b>Protocols/Standards</b>	SIP RFC3261, TCP/IP/UDP, RTP/RTCP, HTTP/HTTPS, ARP, ICMP, DNS (A record, SRV, NAPTR), DHCP, PPPoE, SSH, TFTP, NTP, STUN, SIMPLE, LLDPMED, LDAP, TR-069, 802.1x, TLS, SRTP, IPv6, OpenVPN®.
<b>Audio technology</b>	Wide-band Opus, G.722, G.711µ/a, G. 729A/B, G.726-32, iLBC, in-band and out-ofband DTMF (In audio, RFC2833, SIP INFO), VAD, CNG, AEC, PLC, AJB, AGC, ANS
<b>Language support</b>	English, German, Italian, French, Spanish, Portuguese, Russian, Croatian, Chinese, Korean and Japanese
<b>Compliance</b>	FCC: Part 15 Class B; Part 15 Subpart C(15.247); Part 15 Subpart E(15.407); Part 68 HAC IC: RSS-247; RSS-Gen; RSS-102; IECS-003; CS03 CE: EN 55032; EN 55035; EN 61000-3-2; EN 61000-3-3; EN 62368-1; EN 301 489-1; EN 301 489-17; EN 300 328; EN 301 893; EN 62311 RCM: AS/NZS CISPR 32; AS/NZS 4268; AS/NZS 62368.1; AS/CA S004
<b>Article number</b>	6-031202-0019-000