

TCIS-5

IP and SIP Intercom

- Designed according to Disability Act requirements
- Audio Presence – crystal clear audio
- Amazing sound pressure levels when needed with automatic volume adjustment
- Background noise cancellation
- ONVIF compatibel
- Dirt, dust and water resistant – rating IP-66
- Built to last with robust die-cast aluminum frame – rating IK 08
- Supports wide set of IP and networking standards
- Black thermoplastic front plate with two labelled buttons
- Unique labelling solution with PMOLED display
- Ideal for Building Security and Public Environments





Alle IP-Sender der Vingtor-Stentofon Turbine-Serie nutzen die neueste Technologie, um eine unvergleichliche Audioqualität zu erzeugen. Einige der vielen Funktionen sind: HD-Sprachqualität, Open Duplex, aktive Geräuschunterdrückung, MEMS Mikrofon, ein 10W Class D Verstärker und unser einzigartiges Lautsprechergitterdesign. Diese Merkmale, in Verbindung mit der über 65-jährigen Erfahrung von Vingtor-Stentofon in der Akustiktechnologie sind nur einige der vielen Faktoren, die zu unserer überragenden Audioqualität beitragen.



Technical specifications	
Audio quality – percentage articulation loss of consonants (Alcons) – at 70 dB	< 5%*
Audio quality – total harmonic distortion + noise, without noise reduction (THD+N) – at 70 dB	< 2%*
SPL rated power at 1m in open duplex	95 dB*
SPL rated power at 1m in half duplex	105 dB*
SPL rated power at 1m in program distribution and Announcement	105 dB*
Noise cancelling – suppression of musical noise	Yes
Noise cancelling – suppression of static noise	Yes
Noise cancelling – suppression of rapidly changing noise	Yes
Codecs	G.711, G.722, G.729
Frequency range, G.722 Codec	200 Hz – 7000 Hz
Audio technology	- Modes: Full open duplex, switched open duplex - Adaptive jitter filter - Custom Ringing Tone - Audio Mixing – Conversation and Group Call - Sound Level Detection / scream alarm (only in AlphaCom) - Automatic gain control (microphone)
Internal speaker amplifier	10 W class D
Microphone technology	Digital MEMS, omnidirectional microphone
Automatic Volume Control (AVC)	Undistorted and clear audio
Acoustic Echo Cancellation (EAC)	Prevents audio feedback even at high volumes (95dB)
10W Speaker	Matches 10W amp for distortion-free broadcast level sound
*Tested with Audio Precision SYS 2722 equipment	
Ethernet connector	1 x RJ 45
All other connectors	Tool less, spring loaded, vibration proof terminals
General inputs and outputs	6 (configurable)
Outputs	12mA as LED drivers
Change-over relay (NO+NC+COM)	Max: 250 VAC/220 VDC, 2A, 60 W
Power options	PoE and or external power supply
PoE (power over Ethernet)	IEEE 802.3af standard, Class 0 (0.44W to 12.95 W)
External power supply	24 VDC (16 – 48 V)
Power consumption	Idle 1.8W, max 12W (depending on volume)
Audio line out / induction loop signal	600 Ohm
Button backlight	LED
Call indication	Icons/colors for hearing impaired
Door open indication	Icons/colors for hearing impaired
Display technology	PMOLED
Display contrast	20000:1
Viewing angle	160 deg
Display brightness	120 cd/m ²
Display lifetime	50 000 hours (5 years)
Dimensions (HxWxD)	180 x 120 x 73 mm / 7.1" x 4.7" x 2.9"
Dimensions after flush mount	180 x 120 x 20 mm / 7.1" x 4.7" x 0.9"
Dimensions with on wall box	180 x 120 x 82 mm / 7.1" x 4.7" x 3.4"
Weight	0.8 kg / 1.8 lbs
Faceplate material	3 mm PMMA, colour printed on back side
Base / frame material	3 mm Aluminum alloy – A413.O, AISi12Fe, anodized and painted
Electronics cover material	Polycarbonate (translucent)
Gasket material	Silicone rubber
Fastening bracket material	SECC Steel
Button material	3 mm Polycarbonate (transparent)
Button travel length	1.25 mm

Button activation force	350 gf
Button push-cycles before failure	300 000
Anechoic Design	Open flow anechoic design eliminates "standing waves"
Loudspeaker poke protection, large diameter object	3D cast aluminum speaker grille
Loudspeaker poke protection, small diameter objects	Stainless steel mesh, acoustically transparent
Protocols	IPv4 (with DiffServ), SIP, TCP, UDP, HTTPS, TFTP, RTP, SRTP, DHCP, SNMP, Vingtor-Stentofon CCoIP®, NTP
LAN protocols	Power over Ethernet (IEEE 802.3 a-f) Network Access Control (IEEE 802.1x)
Management and operation	HTTP/HTTPS (Web configuration) DHCP and static IP. Remote automatic software upgrade. Centralized monitoring.
Advanced supervision functions	E.g. network test, tone test, status reports
SIP support	RFC 3261 (SIP base standard) RFC 3515 (SIP refer) RFC 2976 (SIP info), SIP using TLS, RFC 5630 SIPS URI scheme
DTMF support	RFC 2833, 2976 (SIP info)
IP rating	IP-66, tested according to EN 60529 (applies when mounted in back box)
IK rating	IK 08, tested according to EN 62262
Operating temperature range	-40° to 70° C
Storage temperature range	-40° to 70° C
Relative humidity	< 95% not condensing
Corrosion	Salty mist, tested according to EN60945
Vibration	Tested according to EN60945
UV-resistant	YES
EMC	CE and FCC Part 15 EN 50121-3-2 Railway application EN 50121-4 Railway application UN Regulation 10, revision 4 + Corr.1 + Amend.1
Compliances	IEC/EN 60945 Marine Equipment IEC/EN 61000-6 Light and heavy industry IEC/EN 50155 Railway Application *IEC/EN 50486 Equipment for use in door-entry systems * With additional conformal coating Requires use of EN 50155 approved PoE switch
Certifications	UL 60950-1, cUL 60950-1, CB to IEC 60950-1
IP adress information	Speaks IP address after system boot
Button lifetime	> 1.000.000 cycles
Country of manufacture	Poland
Artikel number	6-031208-0002-000

Dimensions

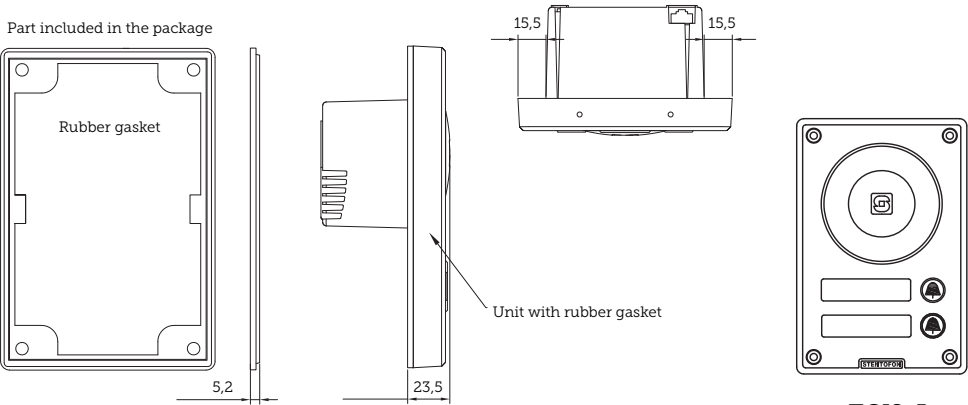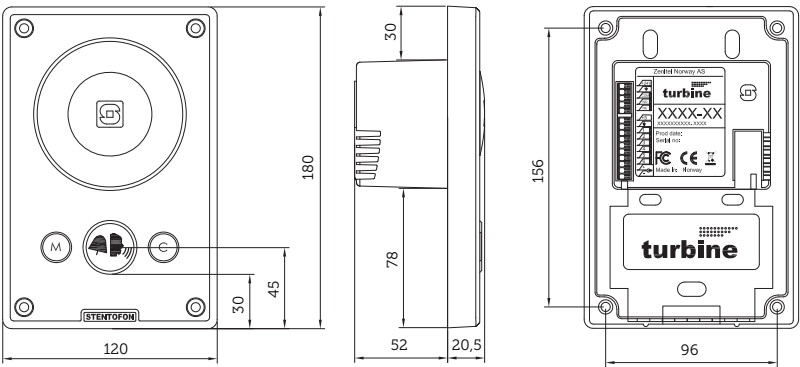

TCIS-5

Accessories



Surface mount box
6-031208-0004-000



Flush-mount box mini
6-031208-0007-000



Bracket Double Depth Back Box
6-031208-0008-000



Flush-mount box
6-031208-0010-000

