


S-LINE BOOM LIGHTING LED

Boom lighting LED on the underside up to 8 metres

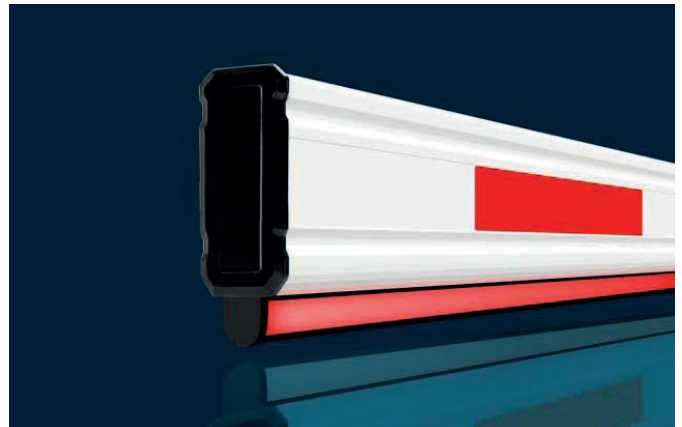

- Uniform lighting over the entire length of the boom
- Translucent rubber profile
- Visible on both sides
- Multi-coloured lighting (red / green / blue possible)
- The lighting can be freely configured via the MO 24 barrier control.

Example:

Barrier closed = **red**,

Barrier in motion = **red flashing**,

Barrier open = **green**.

- LED technology with low power consumption
- Protection class IP68 (when assembled ex works)
- Up to 6.000mm boom length pre-assembled (complete barrier)
- Up to 8.000mm boom length for on-site assembly (incl. insertion tool)
- Individually shortenable
- Pre-assembled or for on-site installation
- Easy installation
- Can be used with pendulum supports and support posts



30-07-2024 © Copyright Alpatronics

Brandstraat 8a / 9160 Lokeren - Belgium | T. +32 9 340 54 70 | www.alpatronics.be | hello@alpatronics.be | Subject to technical modifications.



ALPATRONICS
innovators in access technology