


TURNI-Q TRIPO D

The durable tripod for frequent use

- Simple and fast installation.
- Long lifespan.
- Operation and detection via contacts, IP or RS485 network.
- Possibility of integration with SDK
- Setup and configuration adjustable to the customer's needs

Extensions

- Integrated access control
- Arrow/cross icon
- Key-operated switch
- Gate (glass or aluminium)

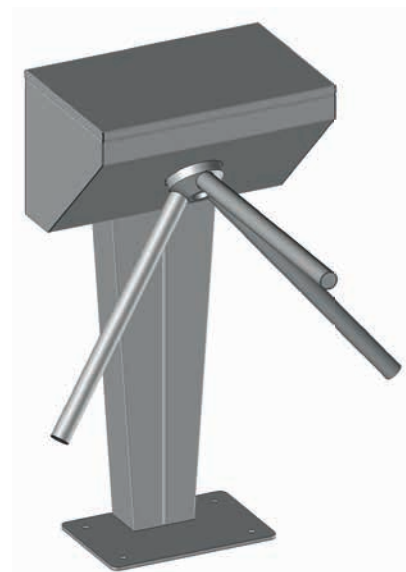

Type	Tripo-D
Profiles frame and rotor	Brushed brushed stainless steel 316
Rotor	120°
Weight approximate (kg)	46
Integration by SDK	Yes
Revolving roto	Pushed by a visitor
Orientation mechanism	Pass bi-directional
Power supply	230Vac 230Vac (24Vdc possible)
Consumption (standard version)	30W
Operating temperature	-15°C until +45°C
IP protection class	IP43
Maximum throughput / minute	30 with free passage and 20 with controlled access
MTBF	+1.000.000 cycles
Warranty	2 years
Article number	1-020401-0001-000-070-32




10-11-2023 Copyright Alphasatronics

Brandstraat 8a / 9160 Lokeren - Belgium | T. +32 9 340 54 70 | www.alphasatronics.be | hello@alphasatronics.be | Subject to technical modifications.



ALPHASATRONICS
innovators in access technology

Dimensions

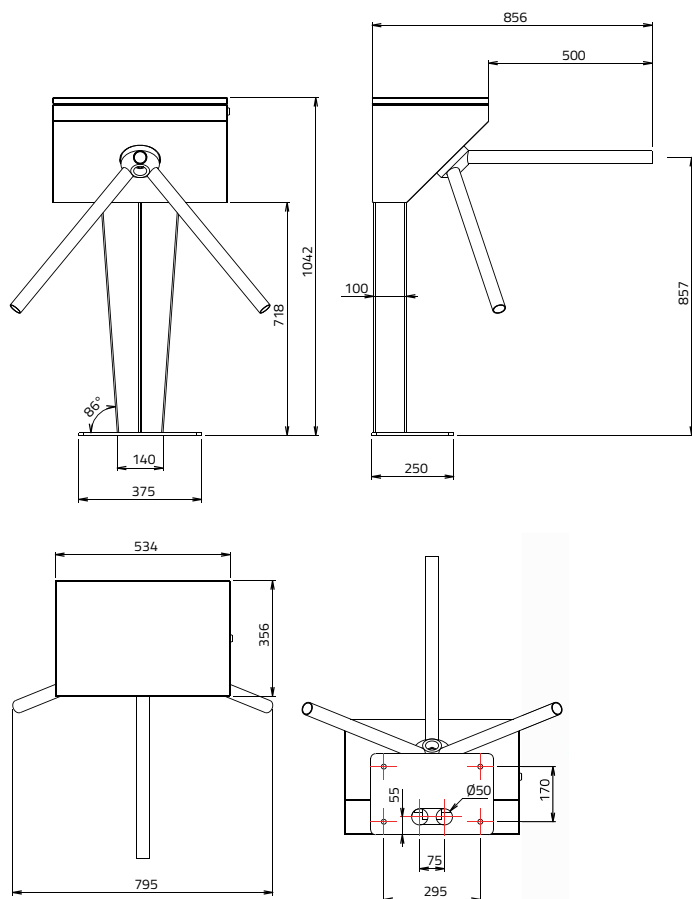

Optional

- Gateway in glass or aluminum

