

# SIGNAGE DISPLAY

## OrtoLine 2100 - 55" Display

- 55 Inch LCD Screen
- High Brightness: 2500Nits
- IP66-Fully Enclosed System
- Maintenance Free
- ANDROID OS / WINDOWS OS / TV BOARD- FHD 1920X1080
- Content can be easily replaced
- Information can be real-time or time-controlled
- Interaction via touch screen (optional)
- Centralised content management possible
- Mounting frame mounted on robust welded column with reinforced base
- Article number: 1-120601-0001-000-716-00



IP Rating



High Brightness



Ultra Thin



Four Seasons



Horizontal & Vertical



Tempered Glass




04-07-2023 © Copyright Alpatronics

Brandstraat 8a / 9160 Lokeren - Belgium | T. +32 9 340 54 70 | [www.alpatronics.be](http://www.alpatronics.be) | [hello@alpatronics.be](mailto:hello@alpatronics.be) | Subject to technical modifications.



**ALPHATRONICS**  
innovators in access technology

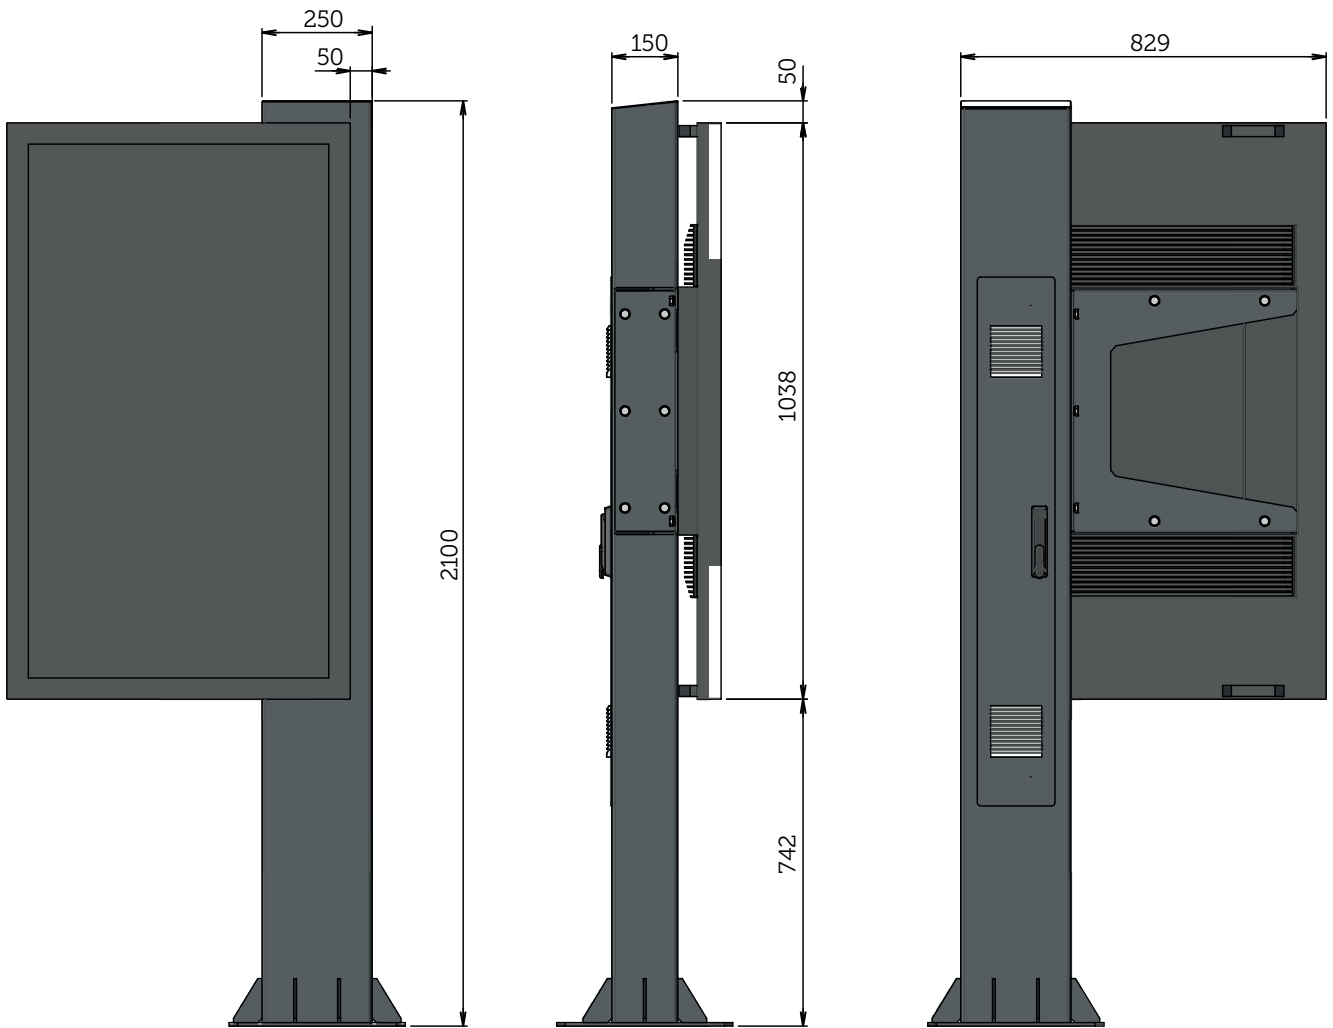

## Technical specifications

Panel	
Panel Size (inch)	55
Active Display Area (h x w)	1210 x 680
Resolution (pixel)	1920 x 1080
Aspect Ratio	16 : 9
Brightness (nits)	2500
Contrast Ratio	4000 : 1
Grey to Grey Response Time (ms)	6 ms
Viewing Angle (H/V)	178°/178°
Backlight Configuration	Direct LED
Operational Life Cycle-mtbf (hours)	50.000
Power	
Input Voltage	110VAC / 220VAC, 50 / 60 HZ
Max Power Consumption (w)	330
Environment	
IP Rating	IP66
Operating Environment	Fully outdoor
Operating Temp.	-20°C + 45°C
Operating Humidity	5% - 98%
Operating Altitude (m)	≤ 2000m

## Fundering

- Base height: 20 cm above floor level
- Base depth: 80cm below ground level
- Frost-free concrete
- conduit to be provided min. diameter 50 mm
- Threaded rods M10, min. 40cm deep

