


SmartLine

Multifunctional corrosion- and welding-free column for indoor and outdoor use

- Aluminium Terminal for indoor and outdoor use - no corrosion possible.
- Robust design, industrial components for intensive use.
- Modular design.
- RAL colour of your choice and lettering possible on request.
- Lockable door with 3-point locking system.
- Flexibly installable electronics plates.
- Made in Belgium.

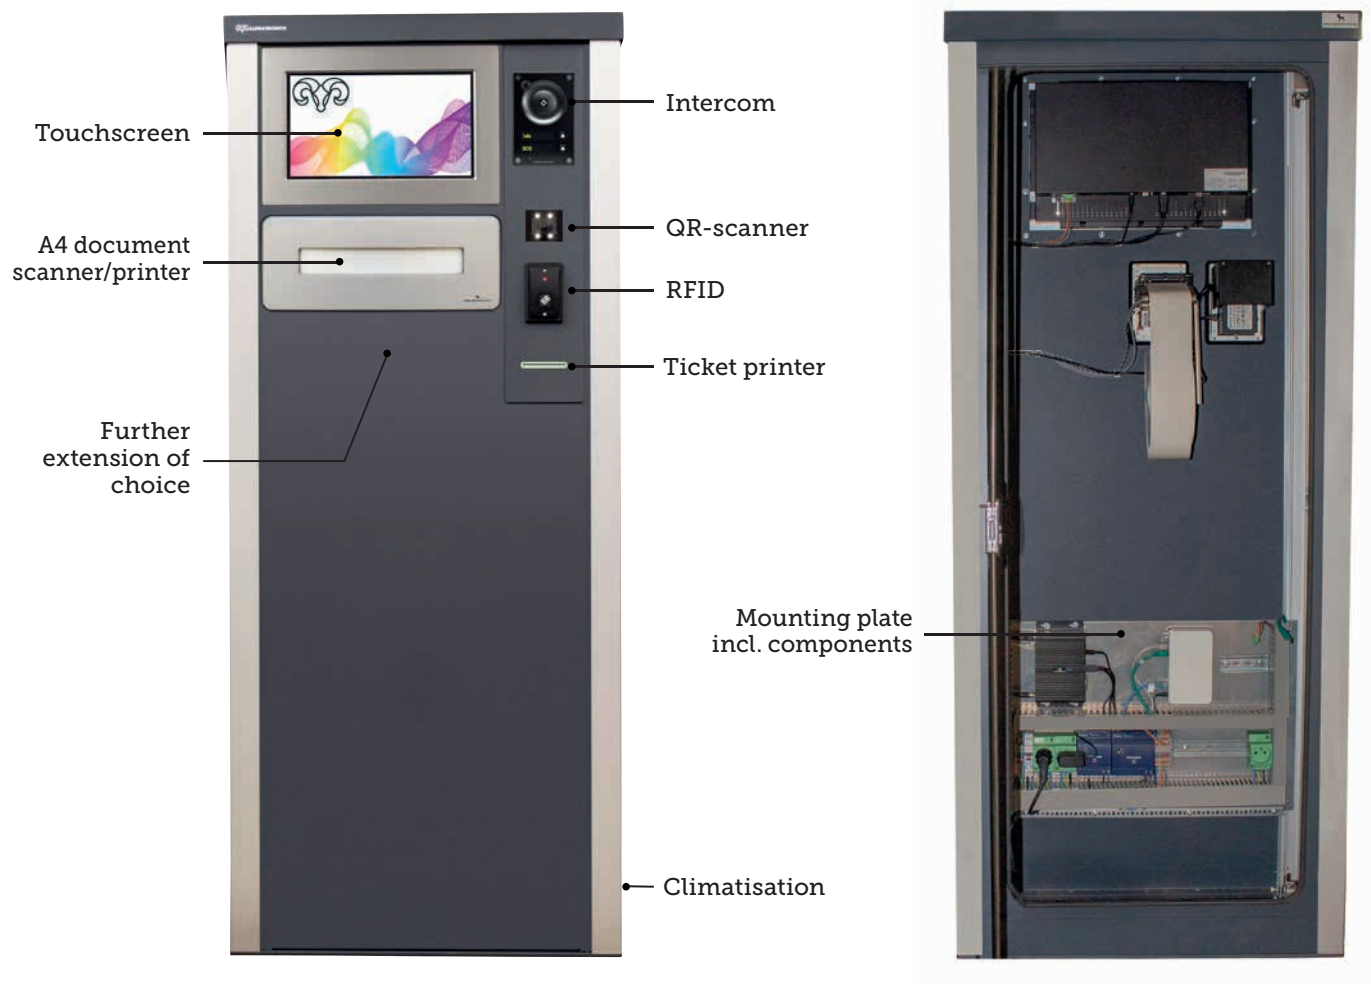


* The image shown is an example, compose your own column

Heights	1,2 m	1,5m	1,8 m	2,4 m
Housing dimensions - W x D x H	W = 380 / 500 / 750 / 1000 x D = 330 x height (mm)			
Installation depth	324 mm			
Side panels and roof	aluminium, RAL7016 textured paint finish, 2 mm thick			
Footplate	Aluminium, RAL7016 textured paint finish, 8 mm thick			
Corner profiles	Natural-coloured anodised aluminium Structured coating in RAL colour on request			
Door	Hinged and lockable rear door 3-point locking with integrated semi-profile euro cylinder lock			
Mounting plate	Included as standard - Height: 250 to 500 mm			
Fixation on substrate	Invisible fixing with wedge bolts or threaded rods			
Weight	+/- 32 kg	+/- 45 kg	+/- 57 kg	+/- 73 kg
IP value	IP 54			
Warranty	2 years			




Dimensions

Operating column for cars (1,2 m - 1,5 m) • Pedestrians (1,8 m) • Trucks (2,4 m)

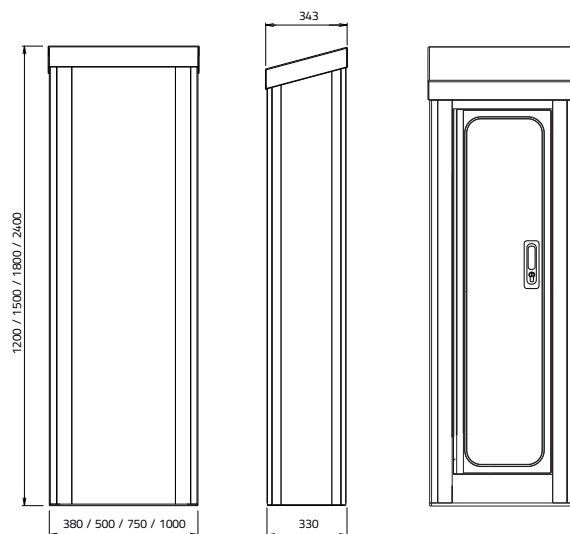

Which foundation for which column				
Width Column	380mm	500mm	750mm	1000mm
Footplate	<p>200mm 150mm 380 x 330mm</p>	<p>200mm 150mm 500 x 330mm</p>	<p>200mm 150mm 750 x 330mm</p>	<p>200mm 150mm 1000 x 330mm</p>
Concrete pedestal	<p>480mm 430x480x600mm</p>	<p>600mm 430x600x600mm</p>	<p>850mm 430x850x600mm</p>	<p>1100mm 430x1100x600mm</p>

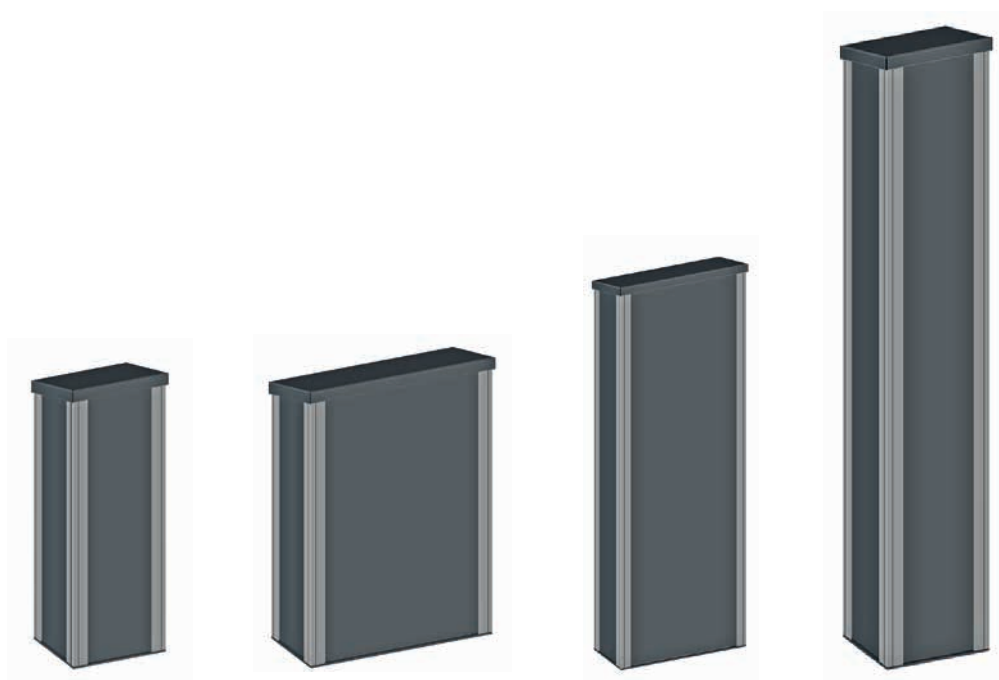

Options

<p>Configure your SmartLine yourself</p>	<p>Possible standard extensions:</p> <ul style="list-style-type: none"> • Touch screen 12", 15", 17" • Kiosk printer • Intercom • QR scanner • A4 document scanner • A4 laser printer • RFID reader <p>• Apply your own devices</p>
	<p>Cabinet lighting Optional lighting to facilitate working inside the column</p> <ul style="list-style-type: none"> • On/off switch • 24 V AC/DC ... 240 V AC/DC • Length: 350 mm • Protection class: IP20 <p>Article number: 4-030301-0006-000</p>
	<p>Wind influence protection Prevents the door to completely opening/ closing during operations</p> <p>Article number: 1-070700-0004-000-000-00</p>
	<p>Cable Shield By shielding the cables at the bottom of the pedestal, a clean finish is achieved. It also guarantees additional safety for third parties opening the pedestal</p> <p>Article numbers: 380 x 330 mm: 1-070700-0005-000-000-00 500 x 330 mm: 1-070700-0006-000-000-00 750 x 330 mm: 1-070700-0007-000-000-00 1000 x 330 mm: 1-070700-0008-000-000-00</p>
	<p>Foundation mould Save time on installation by installing a foundation template</p> <p>Article numbers: 380 x 330 mm: 1-070700-0010-000-000-00 500 x 330 mm: 1-070700-0011-000-000-00 750 x 330 mm: 1-070700-0012-000-000-00 1000 x 330 mm: 1-070700-0013-000-000-00</p>
	<p>Additional mounting plate Fit an additional mounting plate to mount third-party equipment</p> <p>Article number: 1-070700-0009-000-000-00</p>